

Electronic Faucet

AF322

Electronic Faucet


AF322 AC AF322 DC

Double Sensor



All-In-One

Faucet with Hot and Cold Water Supply

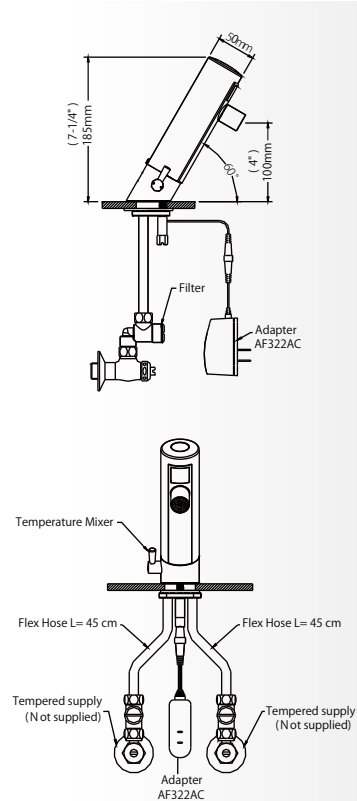

● **AF322AC** : Input AC110 V~AC220V 50/60 Hz. Output DC 6V
Power Consumption: 0.3W (Idle), 5W (In use)

● **AF322DC** : Size AA Alkaline Battery * 4pcs
Battery Life : 2 Years (Based on 3000 cycles per month)
Low Battery Indicator Light (LED)

- Double Infrared Sensor : Automatic Operation
- Stable performance, infrared sensor performs perfectly even in the sunlight or any light.
- Waterproof, high quality and safety.
- Chrome Plated Cast Brass
- Infrared Sensor Range : Adjustable 5cm~ 20cm (auto adjusted)
- Shut-off Delay Time : 1sec
- Time out Setting: Wave Sensor(facing up): 3minutes
Sensor(facing down): 1minute
- Include Filter: it filters out particles in water hence reducing maintenance cost; easy to take out and clean
- With Integral Spout Temperature Mixer
- Operating Water Pressure : 10 to 100 PSI
- Water Supply Connection: PF 1/2
- Mounted on a Single-Hole Lavatory or Deck (28Φ~45Φ)
- Applicable Water Temperature: 39°F~185°F (4°C~85°C)
- Warranty : 2 years



AF323

Electronic Faucet


AF323 AC AF323 DC

Double Sensor



All-In-One

Faucet with Single Line Water Supply

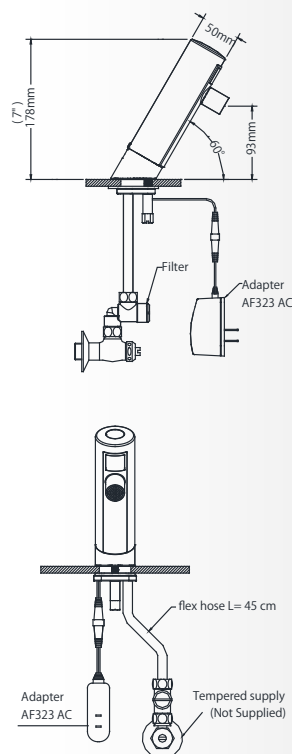

● **AF323AC** : Input AC110 V~AC220V 50/60 Hz. Output DC 6V
Power Consumption: 0.3W (Idle), 5W (In use)

● **AF323DC** : Size AA Alkaline Battery * 4pcs
Battery Life : 2 Years (Based on 3000 cycles per month)
Low Battery Indicator Light (LED)

- Double Infrared Sensor : Automatic Operation
- Stable performance, infrared sensor performs perfectly even in the sunlight or any light.
- Waterproof, high quality and safety.
- Chrome Plated Cast Brass
- Infrared Sensor Range : Adjustable 5cm~ 20cm (auto adjusted)
- Shut-off Delay Time : 1sec
- Time out Setting: Wave Sensor(facing up): 3minutes
Sensor(facing down): 1minute
- Include Filter: it filters out particles in water hence reducing maintenance cost; easy to take out and clean
- Operating Water Pressure : 10 to 100 PSI
- Water Supply Connection: PF 1/2
- Mounted on a Single-Hole Lavatory or Deck (28Φ~45Φ)
- Applicable Water Temperature: 39°F~185°F (4°C ~ 85°C)
- Warranty : 2 years

