

## Purleve PurStream Faucet

### Product #6200 Description

Sensor Activated, Electronic, Pedestal Hand Washing Faucet for tempered or hot/cold water operation.

- Branding can be placed in front or back of faucet.
- Filtered solenoid valve with serviceable strainer filter
- Splash-proof circuit control module protects components from water damage.
- Adjustable infrared sensor range sets faucets for specialized user requirements.
- Deck-mount faucets come in two centerset faucet heights and two gooseneck heights, which let specifiers pick the right style for the job.
- 0.5 gpm/1.5 Lpm, 1.5 gpm/5.7 Lpm and 2.2 gpm/8.3 Lpm flow rates vary by spray head type.
- Faucet Kit includes Faucet, Control Module, 4" Trim Plate (8" optional accessory), T Connector, and appropriate mounting hardware.
- Choose from battery-powered models or 6 VDC transformer-powered operation with battery backup.

### Flow Rate


Continuous rate flow is 1.08 gpm. Control Solenoid Box can be set at 2, 66, and 10 second intervals. Aerator is changeable

### Operation

PurStream operates like traditional sensor faucets - the user's hands enter the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing water to flow from the faucet. Water will flow until the hands are removed or until the faucet reaches its automatic time out limit setting.

### Water Supply

18 inch stainless steel braided supply hose with 1/2" female pipe thread. Control box with two 1/2" male pipe threaded connectors.

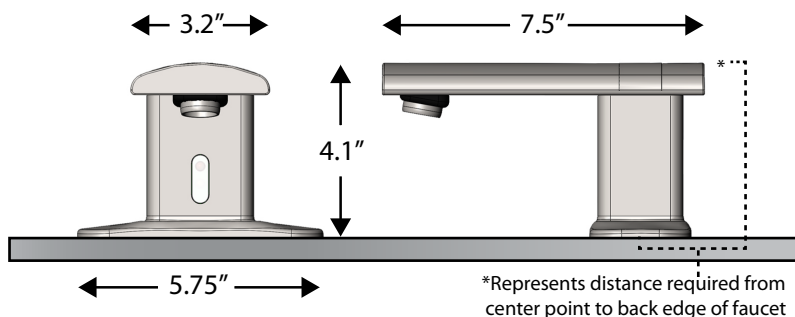

LOGO placed on Back Side



LOGO placed on Front Side



### Faucet Specifications

- *Mount Type:* Single hole application
- *Mount Depth:* Total Depth is 7.5"
- *Mount Length:* Escutcheon plate is 5.75"
- *Overall Height/Width/Length of Faucet:* 4.1" x 5.75" x 7.5"
- *Mount Adapter:* Escutcheon plate is provided with each faucet  
**NOTE: 8" Escutcheon plate is available**
- *Weight:* Total unit weight with water control box is approx. 9lbs
- *Material of Construction:* Main housing is Aluminium, water way is made from Delrin
- *Faucet Finish Availability:* Chrome
- *Spout Length:* 6.2"
- *Sensor Range:* 8" Adjustable
- *Water Connection:* 1/2"
- *Standard Aerator:* 1.08gpm
- *Warranty:* 1 Year

